





Asphalt woven wire screen meshes

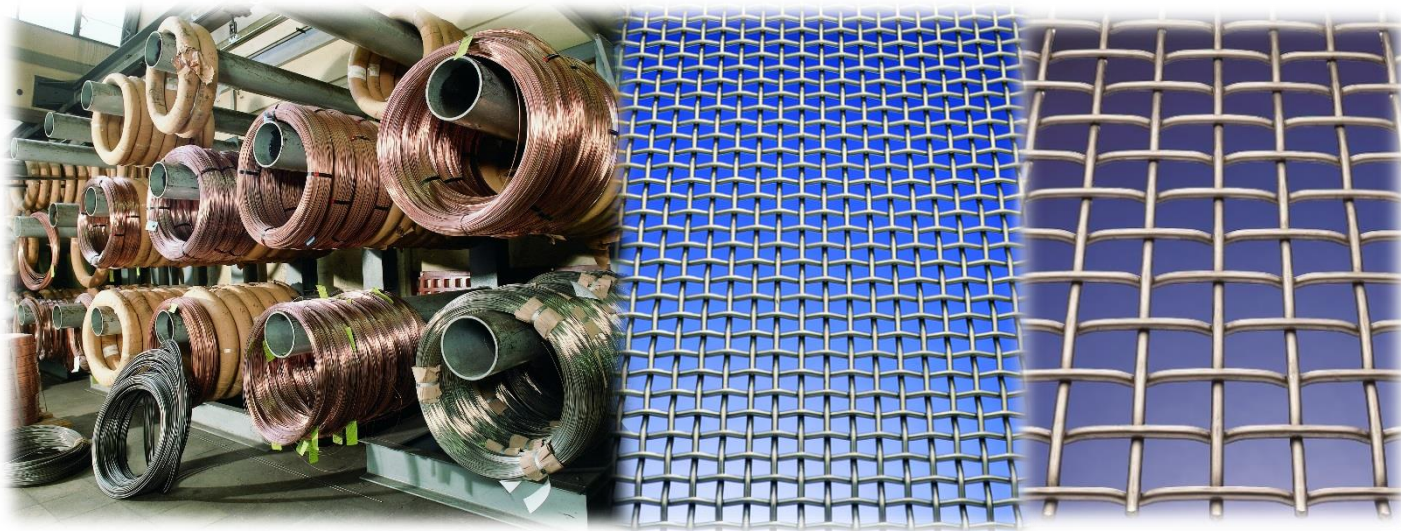

The recognised leader of polyurethane screening media also manufactures woven wire
Produced according to DIN 4192 / ISO 4783-3 in Spring Steel DIN 17223 A or Stainless
Steel 1.4301 with an aperture range from 1.0mm square x 0.5mm \emptyset wire upwards



4 Great Central Way, Woodford Halse, Northamptonshire NN11 3PZ

Tel: 01327 264227 | screendecks@tema.co.uk |

www.temaisenmann.co.uk








Square mesh aperture range with quick delivery times in spring steel DIN 17223 A. (subject to change)

Aperture mm	Wire Ø mm	Open area %	Weight kg/m ²
1.0	0.7	35	3.7
1.5	0.7	46	2.8
1.8	0.8	48	3.1
2.0	1.2	39	5.7
2.5	1.2	46	4.9
2.5	1.6	37	7.9
3.0	1.6	43	7.1
3.2	1.6	44	6.8
4.0	2.0	44	8.5
5.0	2.0	51	7.3
5.0	2.5	44	10.6
5.5	2.0	54	6.8
5.5	2.5	47	9.9
6.0	2.0	56	6.4
6.0	3.0	44	12.7
6.5	3.0	47	12.0
7.0	2.0	60	5.6
7.0	2.5	54	8.4
7.5	3.0	51	10.9
8.0	2.5	58	7.6
8.0	3.0	53	10.4
8.0	4.0	44	16.9
8.5	3.0	55	9.9
9.0	2.5	61	6.9
9.0	3.0	56	9.5
9.0	4.0	48	15.6
9.5	2.5	63	6.6
9.5	3.0	58	9.1
10.0	3.0	59	8.8
10.0	4.0	51	14.5
11.0	4.0	54	13.6
12.0	2.5	69	5.5
12.0	3.5	60	10.0
12.0	5.0	50	18.7
12.5	3.0	65	7.4
13.0	3.5	62	9.4
13.5	3.0	67	6.9
14.0	4.0	60	11.3

Aperture mm	Wire Ø mm	Open area %	Weight kg/m ²
16.0	4.0	64	10.2
17.0	4.0	66	9.7
18.0	4.0	67	9.2
19.0	4.0	68	8.8
20.0	4.0	69	8.5
22.0	5.0	66	11.8
25.0	5.0	70	11.0
25.0	6.0	65	14.8
28.0	6.0	68	13.5
30.0	5.0	73	9.1
30.0	6.0	70	12.7
32.0	6.0	71	12.0

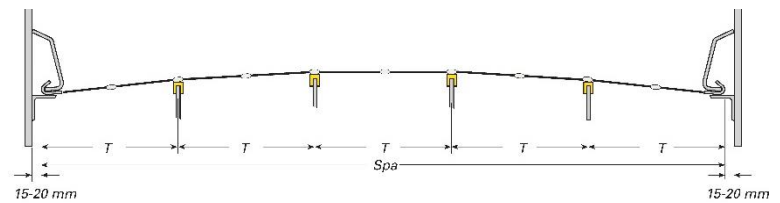

Side tensioned design
 SPA = Over hook dimension
 FL = Length of mesh

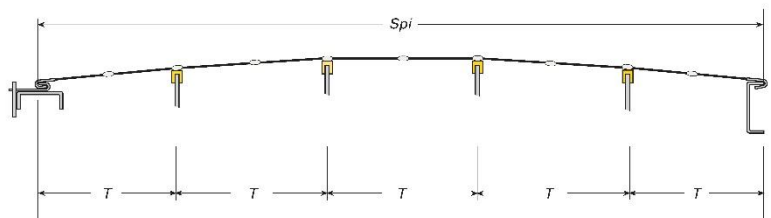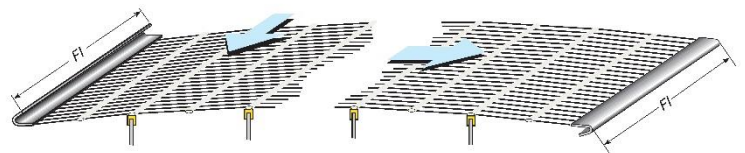

End tensioned design
 SPI = Inside hook dimension
 FL = Length of mesh

4 Great Central Way, Woodford Halse, Northamptonshire NN11 3PZ

Tel: 01327 264227 | screendecks@tema.co.uk |

www.temaisenmann.co.uk

